

HAGNER EC1 LUXMETER


The Hagner Digital Luxmeter is a small, handy and extremely easy-to-use instrument for accurate measurement of illuminance over a range of 0.1-200,000 lux.

Feature

1. Silicon photodiode detector
2. Measure and directly read
3. Extremely easy to use
4. Automatic zeroing and On/ Off switch

Specification

Detector:	Silicon photodiode V_{λ} -filtered and cosine corrected
Measuring range:	0.1-200,000 lux
Accuracy:	Better than $\pm 3\%$ (± 1 in last digit)
Power supply:	9 volt battery type PP3 alkaline (lifetime approx. 350 hrs)
Temperature drift:	$< 10^{\circ}\text{C} + 0.35\% / ^{\circ}\text{C}$ $> 30^{\circ}\text{C} - 0.35\% / ^{\circ}\text{C}$
Dimensions:	135 x 75 x 35 mm
Weight:	0.19 Kg

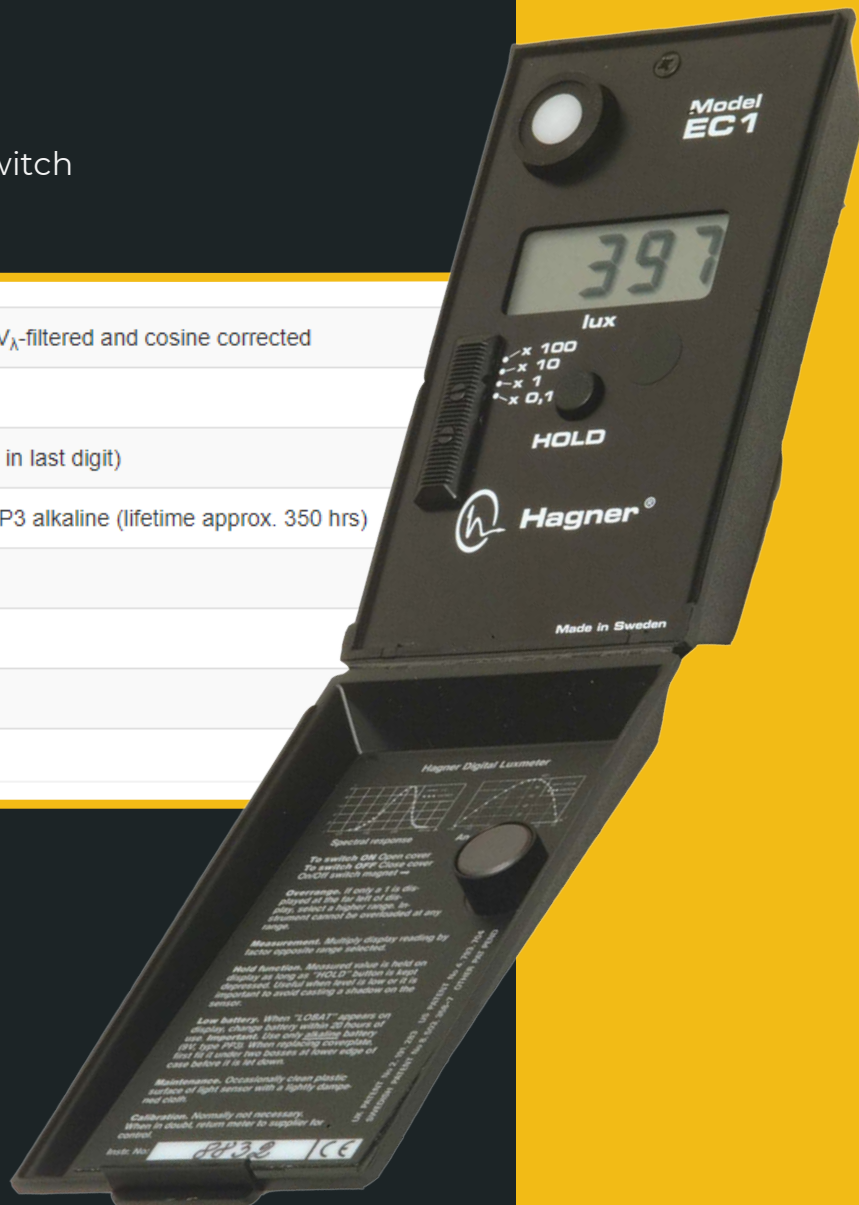

+62 821 4486 1199

For More Information
sales02@totalenviro.co.id

Visit Us
totalenviro.co.id